


CAN-D I-BEAM FESTOON TROLLEYS

Introducing CAN-D Electrification's new line of I-Beam Festoon Trolleys. These light-duty trolleys feature adjustable chassis designed to fit varying beam sizes. Available in 1, 2 or more saddle assemblies, these trolleys are not only versatile, but affordable too!

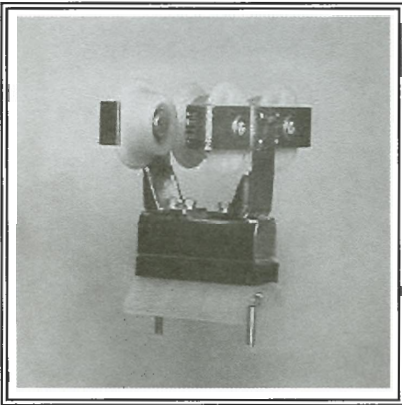

Above: 4-Wheel I-Beam Standard Trolley. Nylon moulded saddle and plated steel trolley to support flat cable. Cables may be stacked in saddle.


APPLICATIONS

- ✓ Gantry Cranes
- ✓ Overhead Cranes
- ✓ Monorails
- ✓ Specialized Equipment

FEATURES & BENEFITS

- Also available with two or more saddle assemblies
- ✓ Suitable for indoor usage
- ✓ Accommodates a wide range of cable sizes
- ✓ Adjustable Chassis for varying beam sizes
- ✓ Positive gripping force
- ✓ Competitive pricing!

Right: 2-Wheel I-Beam Standard Trolley. Nylon moulded saddle and plated steel trolley to support flat cable. Cables may be stacked in saddle.

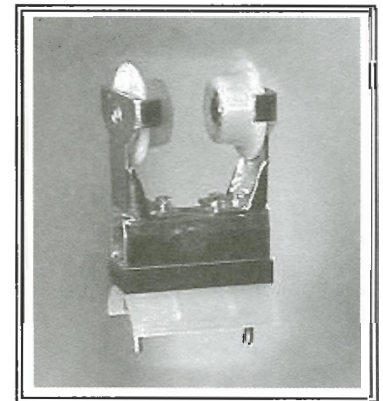

TECHNICAL SPECIFICATIONS

BODY: Galvanized Steel
MAX SPEED: 60m/minute
MAX LOAD/4-WHEELTROLLEY: 60Kg/Trolley
MAX LOAD/2-WHEELTROLLEY: 30Kg/Trolley
4-WHEEL MAX WINDOW DIMENSIONS: 2 1/4" x 7/8"
2-WHEEL MAX WINDOW DIMENSIONS: 2 1/4" x 7/8"

Consult factory for max window dimension deeper than 2 1/4"

Note: The 2-wheel I-Beam trolley is suitable for systems up to 60ft.
 All Systems over 60ft must use the 4-wheel I-Beam trolley.

For more information on our I-Beam Festoon Trolleys, please contact our factory at 1-888-504-5151 in Canada and the USA. Our Sales Reps are more than happy to assist with your specific needs.